

# Link/2500

Your smart, sleek and simple payments solution



- Specifically engineered for flexibility to accept all payment methods including NFC/Contactless, Apple Pay and Samsung Pay
- Optimize your payment solution for any existing infrastructure thanks to a fully versatile connectivity options
- Payment acceptance in your pocket! The ideal payment terminal for busy mobile merchants



ingenico



The Link/2500 brings payment acceptance solution to any mobile business.



**Pocket-sized, light weight and robust design, the Link/2500 is the perfect business acceptance point**

**Payments anywhere and anytime**

- 4G, 3G, GPRS, Dual SIM, Bluetooth and WiFi

**Raising the bar on security with PCI PTS compliancy**

**Designed for accessibility:**

- Integrated speaker which could provide vocal assistance
- Real mechanical keypad with raised marking


**Multiple alternative payment methods supported**

- EMV Chip & PIN, contactless, magstripe or digital wallets

**Optimized battery for a long business day on the go (up to 1200mAh)**

**Supported by Ingenico's suite of services**

- Fleet management & security solutions
- Hardware services
- Professional services

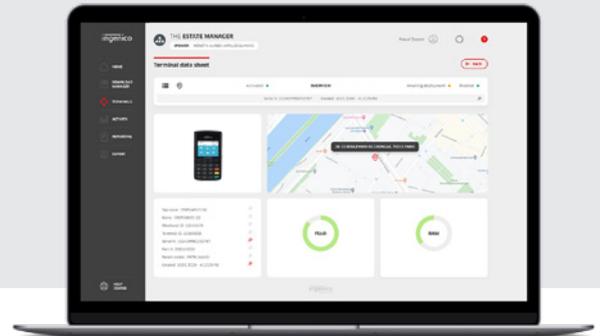

			LINK/ 2500	LINK/ 2500 TOUCH
<b>Processor</b>	• Application & Crypto processor	• Cortex A5	✓	✓
<b>Memory</b>	• Internal	• 256 MB Flash, 128 MB RAM • 128 MB Flash, 128 MB RAM	✓ Option	✓ Option
<b>OS</b>		• Telium TETRA	✓	✓
<b>SIM / SAM</b>		• Up to 2	Option	
<b>Card readers</b>	• Magstripe • Smart card  • Contactless	• ISO 1/2/3, 500K lifespan • EMV Level 1, 50K lifespan • EMV / ISO14443	✓ ✓ ✓	✓ ✓ ✓
<b>Display</b>	• Colour	• 2.4" colour display, backlit, QVGA (240x320 pixels)	✓	✓
<b>Keypad</b>	• Mechanical	• 20 keys, raised marking • Backlighted keypad	N/A	Option
<b>Audio</b>	• Buzzer • Speaker		Option	Option
<b>Terminal connections</b>	• USB Type C	• Host & Slave	✓	✓

			LINK/ 2500	LINK/ 2500 TOUCH
<b>Terminal connectivity</b>	• WAN  • LAN  • Apple IAP Chip • Multicom	• 4G and/or 3G with fallback; Dual SIM • Bluetooth • WiFi (Dual band)  • All connectivities in one single device	Option Option Option Option	Option Option Option Option
<b>Terminal size</b>	• L x W x H	• 129 x 70 x 17 mm (5.07 x 2.75 x 0.67) • 129 x 70 x 18 mm (5.07 x 2.75 x 0.70)	✓ N/A	N/A ✓
<b>Power supply</b>	• Terminal	• 5V 1A	Option	Option
<b>Battery</b>	• Li-ion	• 1200mAh (removable)	✓	✓
<b>Weight</b>	• Full featured	• 155 g (5.46 oz) • 167 g (5.89 oz)	✓ N/A	N/A ✓
<b>Environment</b>	• Charging Temperature • Operating Temperature • Storage Temperature • Operating Humidity	• 0°C to +40°C (32°F to 104°F) • -10°C to +50°C (-14°F to 122°F) • -20°C to +55°C (-4°F to 131°F) • 85% non-condensing at +40°C (104°F)	✓ ✓ ✓ ✓	✓ ✓ ✓ ✓
<b>Accessory</b>	• Cable	• USB A to USB C: 1.5m	✓	✓
<b>Security</b>		• PCI PTS 5.x online & offline certified	✓	✓



www.ingenico.com

ingenico